




WP160MH

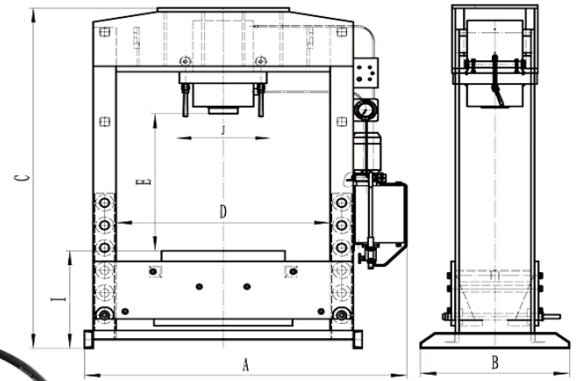

Features:

- Robust Steel Frame Construction
- Moveable Hydraulic Cylinder
- User Friendly Maintenance

Standard Accessories:

- Safety Fence
- V Block
- Dedicated Lifting Sling

Model	WP35MH	WP50MH	WP60MH	WP80MH	WP100MH	WP160MH	WP200MH	WP300MH
Maximum Force	36T	50T	60T	82T	100T	160T	200T	300T
Hydraulic Pressure	22Mpa	Dual Stage - 20/25.5MPa	Dual Stage - 20/26Mpa	Dual Stage - 20MPa/25MPa	Dual Stage - 20/25.5MPa	Dual Stage - 20/25.5Mpa	Dual Stage - 20/24.5Mpa	Dual Stage - 20/23.5Mpa
Cylinder Stroke	250mm	250mm	250mm	250mm	300mm	300mm	300mm	300mm
Ram Speed (Forward/Return)	4.8/6mm/s	3/4mm/s	2.6/3.6mm/s	3.8/5.1mm/s	4/5.7mm/s	4.9/7.3mm/s	3.8/5.5mm/s	2.4/3.5mm/s
Worktable (Size/Inner hole Diameter)	400x300mm/ Φ60mm	550x350mm/ Φ100mm	600x365mm/ Φ100mm	600x420mm/ Φ100mm	650x440mm/ Φ 120mm	700x530mm/ Φ 120mm	750x550mm/ Φ 150mm	800x685mm/ Φ 150mm
Worktable Travel (Increments x Distance)	4 x 200mm	5x150mm	5x150mm	5x150mm	5x150mm	5x150mm	5x150mm	3x200mm
Motor power	1.5kW	2.2kW (2.0HP)	2.2kW	3kW (4.0HP)	4kW (5.4HP)	5.5kw (7.4HP)	5.5kw (7.4HP)	5.5kw (7.4HP)
A	1060mm	1326mm	1376mm	1415mm	1780mm	1776mm	1986mm	1926mm
B	700mm	700mm	700mm	700mm	790mm	870mm	900mm	1020mm
C	2085mm	1805mm	1863mm	1940mm	2120mm	2200mm	2270mm	2320mm
D	650mm	700mm	750mm	800mm	1100mm	1100mm	1300mm	1200mm
E	1030mm	990mm	1027mm	994mm	930mm	905mm	866mm	777mm
I	341mm	376mm	386mm	438mm	597mm	599mm	669mm	748mm
J	360mm	335mm	360mm	380mm	640mm	580mm	730mm	600mm
Weight	380kg	520kg	730kg	950kg	1150kg	1790kg	2750kg	3300kg

* The above specifications are subject to change without prior notice, no liability for mistakes. Machines may be shown with optional equipment.